


## PPA-100/SW

Order No. 0244190



### Stereo headphone amplifier

- 6 separate headphone amplifiers, each with 1 level control and 1 signal/clip LED as well as main/solo switching
- 1 input (solo) per amplifier, switchable to common main input (main)
- Main input with low/high selector switch for matching the input signal
- Inputs: solo (stereo) 6 x 6.3 mm jack, main (stereo) 2 x 6.3 mm jack, 2 x RCA L/R
- Outputs: headphones (stereo) 6 x 6.3 mm jack

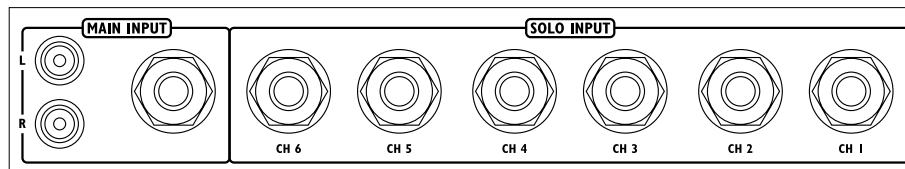

Model	PPA-100/SW
Frequency range	5-30,000 Hz
Input signal	250 mV/50 k $\Omega$ (solo) 250 mV/50 k $\Omega$ (main low) 2.2 V/60 k $\Omega$ (main high)
Output signal	2 x 16 mW/8 $\Omega$ 2 x 45 mW/32 $\Omega$ 2 x 75 mW/600 $\Omega$
S/N ratio	> 60 dB
Channel separation	50 dB
THD	0.02%
Power supply	~ 230 V/50 Hz/11 VA
Dimensions	482 x 44 x 185 mm, 1 RS
Weight	2.3 kg

## PPA-4

Order No. 0243770

### Stereo headphone amplifier

- 4 separate headphone amplifiers in one housing
- 1 level control each per amplifier
- 6.3 mm stereo input
- 6.3 mm stereo outputs

Model	PPA-4
Frequency range	20-20,000 Hz
Input signal	300 mV
Output signal	2 x 16 mW/8 $\Omega$ , 2 x 35 mW/32 $\Omega$ , 2 x 15 mW/600 $\Omega$ (per headphone)
S/N ratio	64 dB
THD	0.1%
Power supply	via encl. plug-in power supply
Dimensions	117 x 93 x 40 mm
Weight	560 g
Inputs	1 x 6.3 mm jack
Outputs	4 x 6.3 mm jack



## HPR-6

Order No. 0244210

**Efficient stereo headphone amplifier**, can also be used as a small power amplifier for 4-8  $\Omega$  speaker systems

- Robust metal housing
- Stereo RCA input
- 6.3 mm stereo output
- Volume control and balance control

Model	HPR-6
Frequency range	19-40,000 Hz
Input signal	110 mV-4 V
Output signal	2 x 525 mW/2 x 1,500 mW/4 $\Omega$ , 2 x 330 mW/2 x 750 mW/8 $\Omega$ , 2 x 114 mW/2 x 200 mW/32 $\Omega$
S/N ratio	69 dB
THD	1%
Power supply	via encl. plug-in power supply
Weight	288 g
Inputs	2 x RCA L/R
Outputs	1 x 6.3 mm jack

